


Home > Vol 20, No 3

## TELKOMNIKA (Telecommunication Computing Electronics and Control)

**TELKOMNIKA (Telecommunication, Computing, Electronics and Control)** ISSN: 1693-6930, e-ISSN: 2302-9293 is a peer-reviewed, scientific journal published by Universitas Ahmad Dahlan (UAD) in collaboration with Institute of Advanced Engineering and Science (IAES). The aim of this journal is to publish high-quality articles dedicated to all aspects of the latest outstanding developments in the field of electrical & electronics engineering and computer science. Its scope encompasses the applications of Telecommunication, Computing, Electrical & Electronics, and Instrumentation & Control. It was first published in 2003. Beginning with issue 1 of volume 16 (2018), TELKOMNIKA will be published as a bimonthly journal (6 issues/year). The journal registered in the CrossRef system with Digital Object Identifier (DOI) prefix 10.12928. The Journal has been indexed by [SCOPUS](#), [Google Scholar](#), [Scholar Metrics](#) etc; accredited 'A' Grade by DGHE (Ministry of Research, Technology and Higher Education, Republic of Indonesia); registered BASE - Bielefeld Academic Search Engine and CORE KMI, etc. The Journal also have a license agreement with ProQuest LLC and EBSCO Publishing.

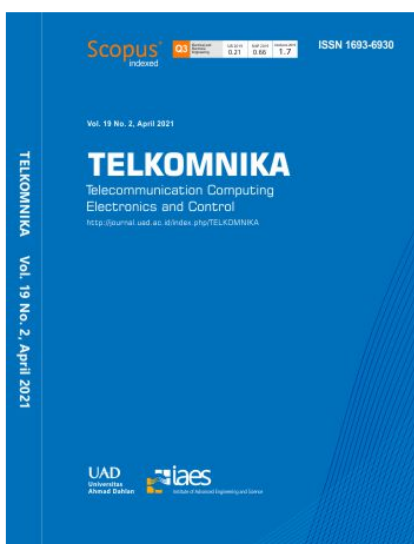

**USER**

Username

Password

Remember me

[Login](#)



**ONLINE SUBMISSION**

[Submit Paper](#)

- QUICK LINKS**
- Author Guideline
  - Editorial Boards
  - Reviewers
  - **Online Submission**
  - Abstracting and Indexing
  - Scopus: Add missing document
  - Publication Ethics
  - Visitor Statistics
  - Contact Us

**JOURNAL CONTENT**

Search

Search Scope

All

[Search](#)

# Vol 20, No 1

February 2022

DOI: <http://dx.doi.org/10.12928/telkomnika.v20i1>

## Table of Contents

Exploiting performance gap among two users in reconfigurable intelligent surfaces-aided wireless systems	<a href="#">PDF</a>
<i>Dinh-Thuan Do, Chi-Bao Le</i>	1-8
Radial radio number of chess board graph and king's graph	<a href="#">PDF</a>
<i>Kulandaivel Maruthamuthu Paramasivam, Kins Yenoke, Baby Smitha Kanaka Muralidharan</i>	9-18
Design of circular-shaped microstrip patch antenna for 5G applications	<a href="#">PDF</a>
<i>Mohammed Mahdi Salih Altufaili, Ameer Najm Najaf, Zainab Sabah Idan</i>	19-26
Characteristic's analysis of associative switching system	<a href="#">PDF</a>
<i>Svetlana A Sadchikova, Mubarak Abdujapparova</i>	27-33
Design and analysis of single layer quantum dot-cellular automata based 1- bit comparators	<a href="#">PDF</a>
<i>Ziyad A. Altarawneh, Mutaz A.B Al-Tarawneh</i>	141-148
Applying artificial intelligence for the application of bridges deterioration detection system	<a href="#">PDF</a>
<i>Xuan-Kien Dang, Le Anh-Hoang Ho, Xuan-Phuong Nguyen, Ba-Linh Mai</i>	149-157
Determination of optimum load resistances of MQ-series gas sensor circuit for specific gas concentrations	<a href="#">PDF</a>
<i>Ajiboye Aye Taiwo, Opadiji Jayeola Femi Jayeola Femi, Ajayi Adebimpe Ruth, Popoola Joshua Olusogo</i>	158-165
Enhancing the efficiency of photovoltaic power system by submerging it in the rivers	<a href="#">PDF</a>
<i>Majid Valizadeh, Ibtihal Razaq Niama ALRubeei, Haider TH. Salim ALRikabi, Faisal Theyab Abed</i>	166-172
Review of microgrid protection strategies: current status and future prospects	<a href="#">PDF</a>
<i>Zaid Alhadrawi, Mohd Noor Abdullah, Hazlie Mokhlis</i>	173-184
Investigation of temperature gradient between ambient air and soil to power up wireless sensor network device using a thermoelectric generator	<a href="#">PDF</a>
<i>Khalil Azha Mohd Annuar, Ramizi Mohamed, Yushaizad Yusof</i>	185-193

## Applying artificial intelligence for the application of bridges deterioration detection system

Xuan-Kien Dang<sup>1</sup>, Le Anh-Hoang Ho<sup>2</sup>, Xuan-Phuong Nguyen<sup>1</sup>, Ba-Linh Mai<sup>3</sup>

<sup>1</sup>Graduate School, Ho Chi Minh City University of Transport, Ho Chi Minh City, Vietnam

<sup>2</sup>Faculty of Engineering and Technology, Van Hien University, Ho Chi Minh City, Vietnam

<sup>3</sup>Science and Technology Department, Ministry of Transport of Vietnam, Hanoi, Vietnam

### Article Info

#### Article history:

Received Jun 01, 2021

Revised Dec 03, 2021

Accepted Dec 16, 2021

#### Keywords:

Convolutional neural networks

Deterioration detection

Embedded system

Firestore cloud

Image processing

### ABSTRACT

Recently, advances in sensor technologies, data communication paradigms, and data processing algorithms all affect the feasibilities of the bridges structural health monitoring and deterioration detection, and other implementations of monitoring operations. The paper proposes a method to design an irregularity detection and monitoring system for road bridges that combines internet of things (IoT) and artificial intelligence (AI) technologies. Raspberry Pi 4 embedded computer integrating IoT and AI technology with convolutional neural network (CNN) is employed to simultaneously monitor remote bridges on websites and apps via Google Firestore cloud database. The first step of successful testing in the laboratory showed that the system can work stably and coincide with the proposed goals.

*This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license.*



### Corresponding Author:

Xuan-Kien Dang

Graduate School, Ho Chi Minh City University of Transport

Number 2, Vo Oanh Street, Ward 25, Binh Thanh District, Ho Chi Minh City, Viet Nam

Email: dangxuankien@hcmutrans.edu.vn

## 1. INTRODUCTION

Bridges are a very important part of transport infrastructure, they are very expensive to construct and maintain, there are many factors leading to bridge deterioration. There have been bridge collapsing incidents leading to serious consequences in terms of lives. By replicating personal self and conscience processes, bridge degradation detection systems (BDDs) deal with real-time sensing, description, and assessment of the security and efficacy evolving of components. This system is comprised of multiple of sensors, data collecting devices, flow information, a network enabling data processing, fault diagnosis and efficiency prognosis, a graphical user interface, and a software [1]-[5].

Recently, many researchers have dedicated themselves to expanding computer technology, deep learning, and computer vision for its excellent advantages in artificial intelligence (AI) [6]-[10], computer vision [11] and internet of things (IoT) technologies [12]-[15]. They tend to use artificial intelligence to discover and perform theorems, speculations, and schemes, and their joinings will make it possible for the accumulation of much more information at a cheap rate, actually results in innovative approaches to condition - based determination and prediction by resolving numerous complicated problems in standard sensing, project addressed, safety assessment, and reliability test. These solutions can assist the system in recognizing a significant inherent progression in the structural behavior in real-world scenarios. Several EU-funded initiatives have previously produced guidelines and suggestions to address the problems and possibilities of bridge structural monitoring and degradation detection [16], [17]. In Korea and Japan, many long-span bridges have applied the monitoring system to monitor the bridge status, but the current system is complicated to use.

In Vietnam, many big bridges have been applied to monitor such as Can Tho, Bai Chay, Thuan Phuoc, ... to observe the bridge situation but have not combined monitoring all bridges in one center.

Techniques for detecting bridge degradation include both physical and nonphysical measures. The stochastic, non-parametric, and auto-regressive frameworks [18] were utilized to investigate a physical structure and anticipate reactions that used modeling. The vibration-based damage detection techniques [19] enable damage identification by comparing actual rates and conventional forms parameters inside the model. Furthermore, the convolutional neural network (CNN) has gained popularity and find excellent, and CNN is a new type of neural network that employs modern theory. CNN is amongst the most latest advancements in the field of image processing [7], language classification [6], [8], and natural speaker recognition [20], [21]. As a result, CNN applications have successfully concentrated on focusing primarily by using directed vibration analysis.

In this paper, we design a monitoring system for parameters and warning of roads on multiple bridges at the same time, each bridge is considered a monitoring node, each monitoring node will be configured as well. As equipment differs depending on bridge type, data at nodes are encapsulated and transmitted, stored in the cloud to monitor status and issue alerts at all bridges through zero technology wire for managing and exploiting the current monitoring system and connecting between monitoring systems in a large area. Sensors and cameras are installed on various parts of the bridge. An alert should be given to the management center for taking precautions whenever there are parameters exceed the threshold value of the system. The following are the key aspects of this work: 1) first, we use convolution neural networks to recognize and predict the state on the bridge from the sensors; 2) we employed IoT technology to monitor on website or remote app of bridges using Google Firebase cloud computing facility to help the management center to monitor multiple bridges at the same time through the internet in different conditions and network quality to ensure data collection center is not interrupted at any time, information quality is always ensured; 3) finally, the connection between the application and Firebase will be made. So users can monitor the parameters to know the current bridge status through sensors parameters.

The remainder of the paper is carried out as follows. The suggested design of the bridge deterioration detection system, which has the primary purpose of damage identification, is shown in section 2. We developed an embedded system utilizing a Raspberry Pi application to perform the detect object procedure, with the acceleration and strain gauge data are given in a line chart and numeric value in section 3, and the testing analysis discussed in section 4. Finally, section 5 concludes the overall observations.

## 2. THE ARCHITECTURE OF THE PROPOSED BRIDGE DETERIORATION DETECTION SYSTEM

When the parameters outperform the system's sensors threshold value, the bridge degradation detection system's main job is always to identify the damage index. Data gathering, artificial intelligence, an alert system, and monitoring are only a few of the modules that carried out the key task. Figure 1 depicts the monitoring and alerting structure for bridges, which is explained as follows:

- Strain gauge and accelerometer sensors: strain gauge and accelerometer of the bridge can be measured by the values of sensors. When these parameters exceed the sensor's threshold value it happens to affect the bridge. The acceleration signals are distinguished in the region and a strain gauge sensor is used to detect the bending. As a result, the sensors generate accelerate and strain gauge data, whereby the signal is transferred to the collecting data module.
- Data collection process: The data acquisition module collects the strain gauge and accelerometer signals. The MCP3204 is a 12-bit analog to digital converter that is handled by the Raspberry embedded processors in this module.
- CNNs were used to detect the bridge's unusual condition: The strain gauge and accelerometer data are sent into the inputs of a CNN algorithm to estimate the bridge damage index. The identification of the training/testing processes in the analysis output is at the heart of this CNN algorithm. Before passing the data to the CNNs algorithm, all of the input data should be standardized. The abnormal situation of the bridge is identified by the classification output via bridge-mounted sensors.

The modules that are mentioned above are strengthened by designing an interface using Qt Designer software for local monitoring on HDMI monitors and designing a website. Moreover, local monitoring and alerting take place at the bridge, while remote mode allows users to view data from anywhere through the internet. Figure 2 depicts the architectural layout.

The architecture of the BDDs is shown in Figure 2 that includes local and remote monitoring and alerting mode. In bridges, the strain gauge and accelerometer are installed at specific points as in Figure 1. The data acquisition module gathers information from sensors. Moreover, bridge operators either monitor locally

at the bridge's HDMI display or remotely via a computer linked to the internet using the Google Firebase cloud database. The two main functions of the system are as below:

- Monitoring function: The monitor system shows the strain gauge and accelerometer data from data collecting. It helps in monitoring the status of data collection from the sensors. The acceleration and strain gauge data are shown in the module as both a line graph and a data field at the bridge.
- Alert function: Whenever the identification outputs are in unusual states, the alert system informs the user that the bridge's status is not safe and sounds an alarm.

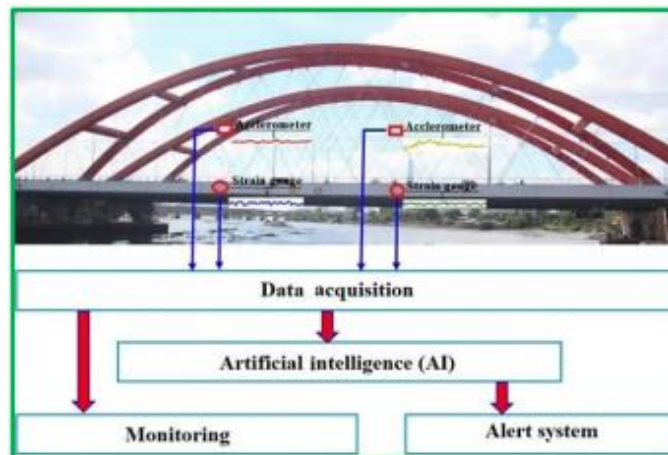


Figure 1. Bridge monitoring and alerting framework

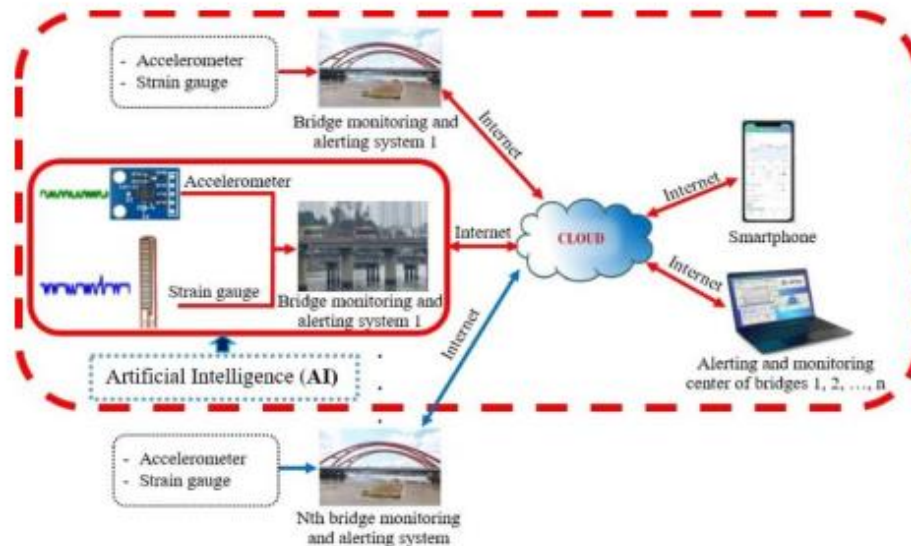


Figure 2. Proposed BDDs architecture

### 3. THE IDENTIFICATION FUNCTION OF DAMAGE INDEX BASED ON CNN

As previously stated, CNN establishes a different type of neural networks (NN) based on deep learning [6]-[9], [22]-[26]. Because the input comprises images/videos, the CNN takes benefit of it and restrains the design more intelligently. The layers of a CNN, unlike a typical NN, are arranged in three dimensions: width, height, and depth. The generated frames calculated from the conductivity characteristics supporting various structural situations are served to the CNN.

#### 3.1. The image pre-processing

The first step to address is the pre-processing block including three image processing stages. The beginning action is to read the RGB picture and transform it to grayscale. As a result, the three-dimensional

picture is modified into a two-dimensional image to minimize the CNN's processing interval. The picture has also been reduced from (875×656×3) pixels to (300×300×3).

A grayscale image is transformed to a feature vector in the second phase, which comprises all of the image's representative features. Here, the vector can have  $n$  dimensions, but we only need one to save processing intervals. The last phase converts the dataset into the characteristics space, where zero represents the mean value and adjusts it to the processing library's required specifications.

### 3.2. Training process

In this study, first, we used the SSD300 network SSD version, so the input photo was resized to 300x300x3 pixels. Then the image is filled into the SSD network with each image having an 8732-default box, then take out the image with the confidence of 200 bounding boxes out of 8732. Next, use the fast non-maximum suppression algorithm to get the bounding box and low confidence is eliminated. Permanently, we use the threshold to get the necessary information of the image as shown in Figure 3. We have the loss function [7], which is comparable to the approach used in other studies:

$$L(x, c, l, g) = \frac{1}{N} (L_{conf}(x, c) + \alpha L_{loc}(x, l, g)) \quad (1)$$

The (1) related to the default boxes:

$$L_{loc}(x, l, g) = \sum_{i \in Pos} \sum_{m \in \{cx, cy, w, h\}} x_{ij}^k \text{smooth}_{L1}(l_i^m - \hat{g}_j^m) \quad (2)$$

where  $\hat{g}_j^{cx} = (g_j^{cx} - d_i^{cx})/d_i^w$ ,  $\hat{g}_j^{cy} = (g_j^{cy} - d_i^{cy})/d_i^h$ ,  $\hat{g}_j^w = \log(\frac{g_j^w}{d_i^w})$  and  $\hat{g}_j^h = \log(\frac{g_j^h}{d_i^h})$ ;  $L_{loc}$  is the smooth  $L$  loss between the anticipated and ground-truth box parameters.  $L_{conf}$  is the certainty loss over multiple classifications (c) as in (3).

$$L_{conf}(x, c) = -\sum_{i \in Pos} x_{ij}^p \log(\hat{c}_i^p) - \sum_{i \in Neg} \log(\hat{c}_i^0) \quad (3)$$

Where:  $\hat{c}_i^p = \frac{\exp(c_i^p)}{\sum_p \exp(c_i^p)}$ ;  $x_{ij}^p = \{1, 0\}$  is a category  $P$  indication for matching the  $i$ -th default box to the  $j$ -th ground truth box. In (4) gives the created scale of the basic boxes [21] for each convolution layer:

$$s_k = s_{min} + \frac{s_{max} - s_{min}}{m-1} (k-1), k \in [1, m] \quad (4)$$

We selected  $s_{min}$  is 0.25 and  $s_{max}$  is 0.95 ( $s_k$  is 0.1, 0.2, 0.375, 0.55, 0.725, 0.9 means 30, 60, 112.5, 165, 217.5, 270 pixels input image (875x656x3)). The algorithm is planned in such a way that the total number of tensors that must be loaded into memory is kept to a minimum. In most situations, it looks through all possible computing orders  $\Sigma(G)$  and chooses the smallest one.

$$M(G) = \min_{\pi \in \Sigma(G)} \max_{i \in 1..n} [\sum_{A \in R(i, \pi, G)} |A|] + size(\pi_i) \quad (5)$$

Where:  $R(i, \pi, G)$  is the list of intermediate tensors that are connected to any of  $\pi_i \dots \pi_n$  nodes,  $|A|$  represents the size of the tensor  $A$ , and  $size(\pi_i)$  is the total amount of memory needed for internal storage during operation  $i$ . Where  $R(i, \pi, G)$  is a listing of transitional convolution layers related to any of the  $\pi_i \dots \pi_n$  nodes,  $|A|$  is the size of the tensor  $A$ , and  $size(\pi_i)$  is the total of memory required for storage capacity throughout process  $i$ .

$$M(G) = \max_{op \in G} [\sum_{A \in OP_{inp}} |A| + \sum_{A \in OP_{out}} |B| + |OP|] \quad (6)$$

As illustrated in Figure 4, we utilize the Google Colab GPU to train the model [10] using input data of 480 pictures for training and 160 images for testing. Moreover, we require an incredibly powerful setup (GPU/CPU) for embedded systems employing Raspberry Pi apps running on smartphones to create these models for practical systems, such that this hardware performs: To detect and recognize, extract selected features of maps including apply convolution filters, the output is labeled with the item, and the confidence level is shown in percentages.

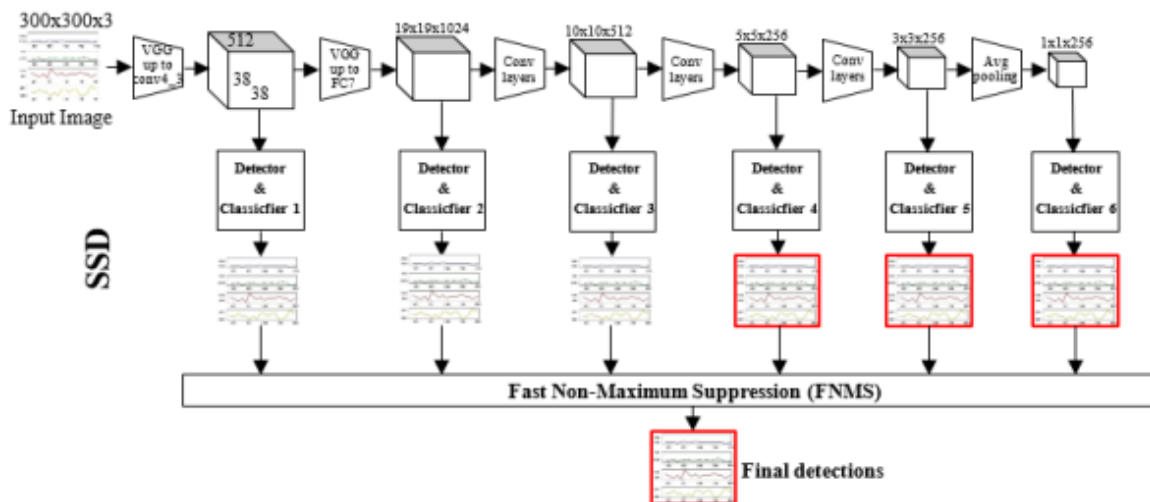


Figure 3. Structure of SSD for BDDs

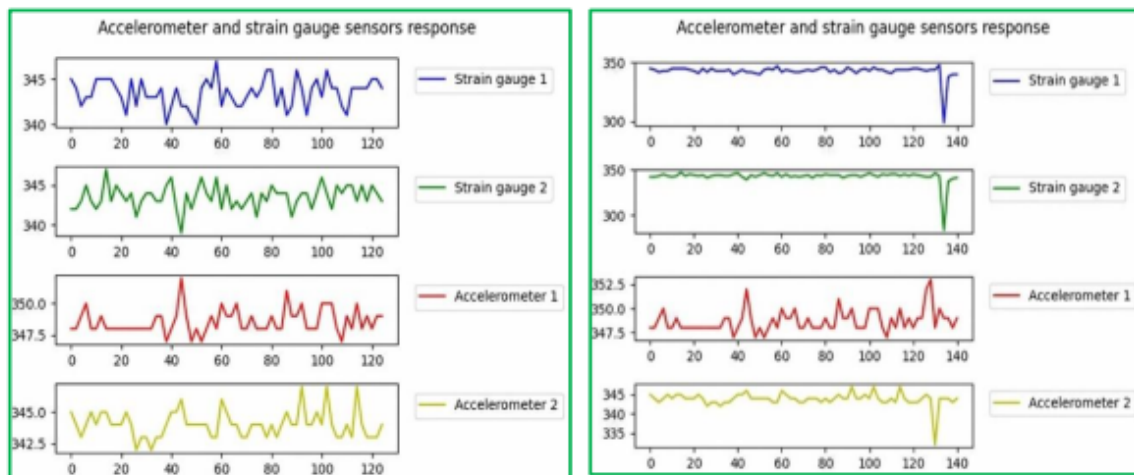


Figure 4. Images input data collection

#### 4. THE PROPOSED BDDs APPLYING ON BRIGE MORNTORING AND ALERTING SYSTEM

##### 4.1. Hardware and algorithm

The hardware of a BDDs-V1 system consists of accelerometer sensors and strain gauge sensors that are analog signals converted to digital signals through the MCP3204 12-bit analog-to-digital converter (ADC) IC which communicates with the Raspberry Pi by SPI protocol as shown in Figure 5. These sensor signals are processed using a CNN, the Raspberry gives an alert by a buzzer and a touch screen in a station. In addition, the alarm signal is also transmitted to the cloud through Firebase Google for monitoring on the website. The algorithm is performed according to the following steps:

Step 1: Collect sensor value pictures from the Raspberry embedded computer, save 1 image with 480 saved photos in succession after 5s, and use the image as an input to the CNN pre - process in Figure 3.

Step 2: Set a label for the saved images; (Normal or Danger)

Step 3: Generate the process of training and testing dataset (Table 1);

Step 4: Create train TFRecord and test TFRecord files;

Step 5: Create label map and configure training;

Step 6: Setup Google Colab for object detection model training;

Step 7: Train on Google Colab.

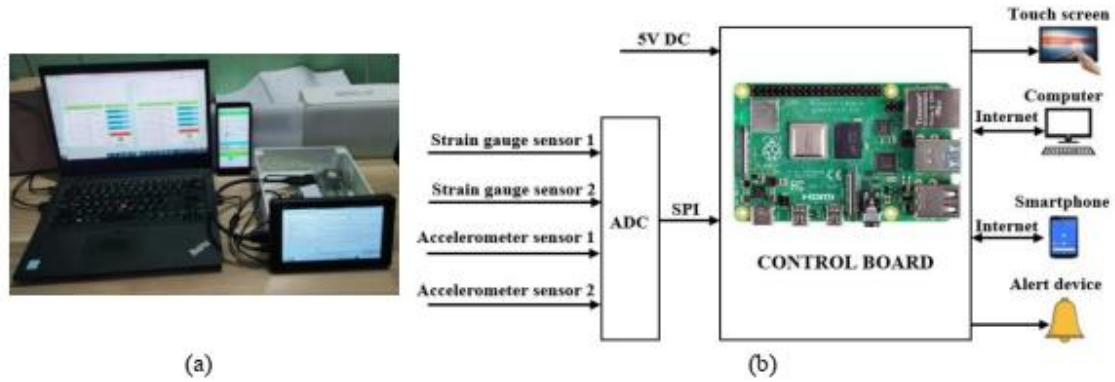


Figure 5. The hardware of a BBDs: (a) BBDs tested on HCM City University of Transport and (b) the structure of BBDs that have been established

Table 1. Distribution of frames, formed from the sensors signals into the dataset

Structural status	Training	Testing
Normal	315	105
Danger	165	55

### 4.2. Experimental

Parameters are set through a data set consisting of 2 cases, Normal and Danger. Normal status includes 315 images and Danger status with 165 images taken from experiments. In this study, the signal from the analog sensor signals is collected by the MCP3204 12-bit analog-to-digital converter (ADC) and sends to the Google Firebase database via the Raspberry Pi control board. Firebase provides access to real-time databases. In Firebase, information is stored as JavaScript object notation (JSON) and synchronized in real-time. Later we designed a website (Figures 6 and 7) to monitor the status of the bridge using web HTML technology developed on the front-end Angular architecture and provided with data through the connection between firebase and the website.

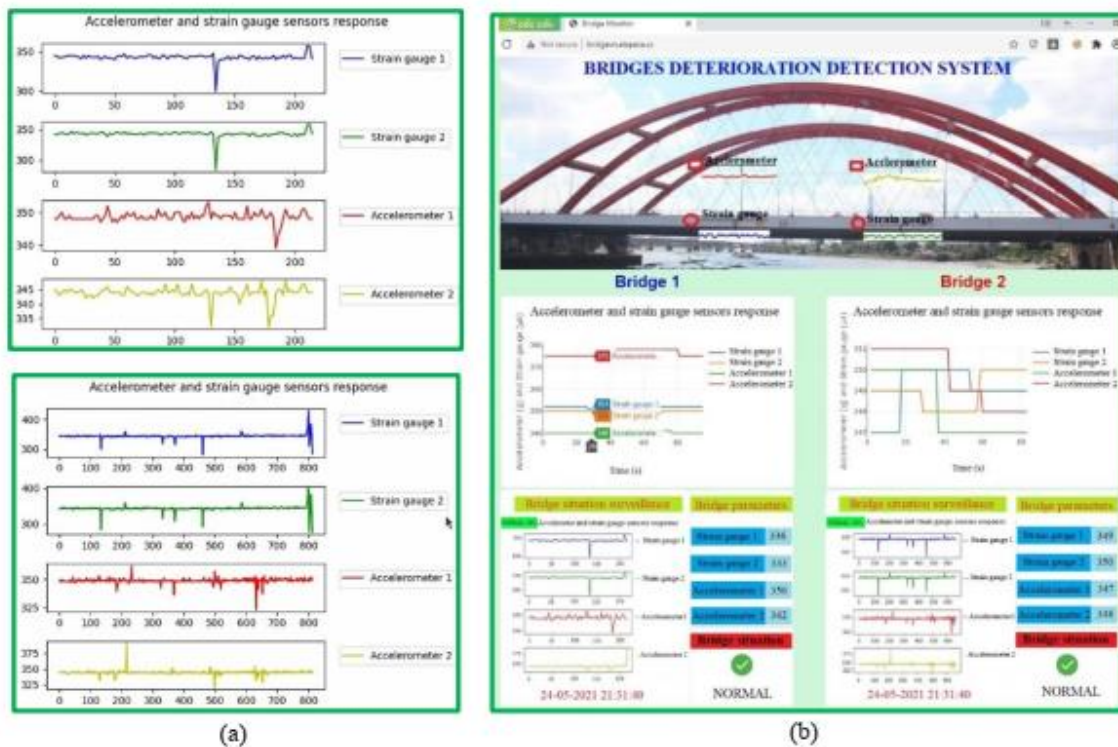


Figure 6. The website to monitor the status of the bridge: (a) image inputs and (b) testing-no alarm stage



When the system decides that no unsafe (abnormal) states exist, a timer will then be activated, and the clock will start. During the active timer duration, switch modes and countdown timer functions will be stopped after 5 seconds to allow for the next phase. However, if unsafe conditions arise in the system during the countdown (no physical effect on the system is required), the timer is reset, the system returns to its normal state, and the system supervisor can operate and record the status using the system function keys. The test recognized a hazardous situation in the experiment, and the outcome was as shown in Figure 7. By using the fast non-maximum suppression method, the output dependency is maximum; the system provided better results in terms of quality, processing speed, and runtime.

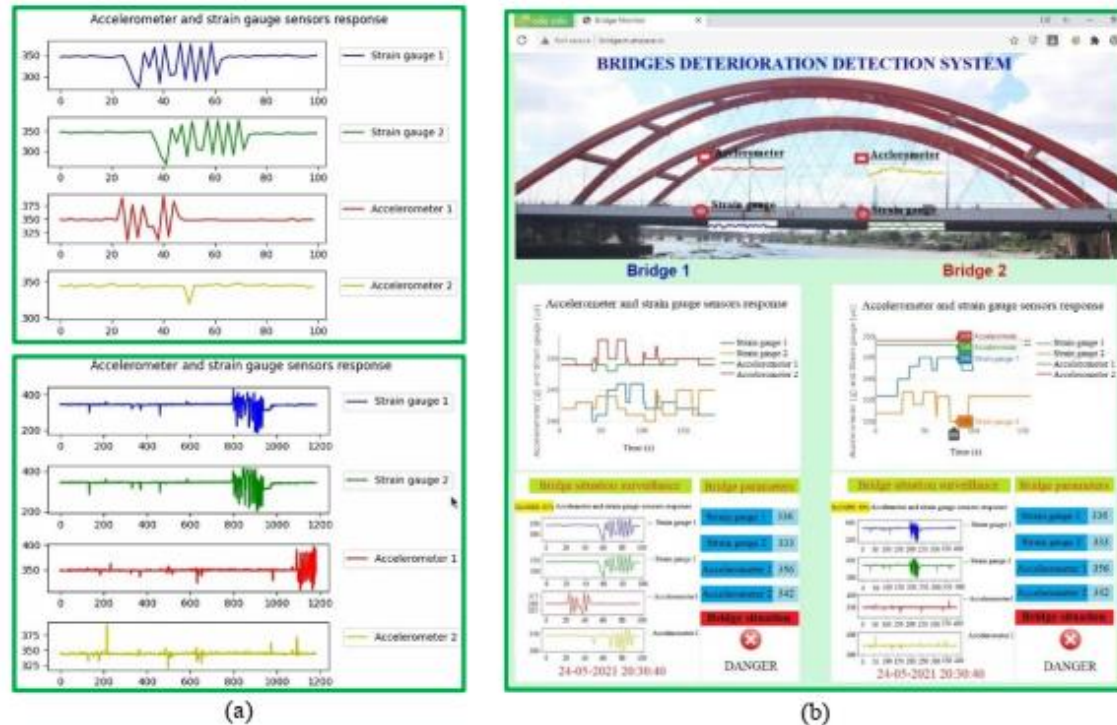


Figure 7. The website to monitor the status of the bridge: (a) image input and (b) testing -alarm stage (dangerous states)

## 5. CONCLUSION

The CNN algorithm was investigated and used for the bridge degradation detection system in this study (BBDs). The designed system uses internet of things (IoT) and artificial intelligence (AI) technologies to monitor remote bridges on websites and apps via the Google Firebase cloud database based on Raspberry Pi 4 hardware. Experimental results showed that the proposed system based on CNN can work stably and concur in actual conditions. The system's ability to function reliably and in accordance with the specified aims was demonstrated in the first phase of successful laboratory testing.

## ACKNOWLEDGEMENTS

This study was supported by DT203038 (2020).

## REFERENCES

- [1] J. Ou and H. Li, "Structural health monitoring in mainland China: review and future trends," *Struct Health Monitoring*, vol. 9, pp. 219-231, 2010, doi: 10.1177/1475921710365269.
- [2] B. F. S. Jr, M. E. Ruiz-Sandoval, and N. Kurata, "Smart sensing technology: opportunities and challenges," *Struct Control Health Monitoring*, vol. 11, pp. 349-368, 2004, doi: 10.1002/stc.48.
- [3] H. Wang, T. Tao, A. Li, and Y. Zhang, "Structural health monitoring system for Sutong cable-stayed bridge," *Smart Struct Syst*, vol. 18, no. 2, pp. 317-334, August 2016, doi: 10.12989/sss.2016.18.2.317.
- [4] X. H. He, X. G. Hua, Z. Q. Chen, and F. L. Huang, "EMD-based random decrement technique for modal parameter identification of an existing railway bridge," *Engineering Structures*, vol. 33, no. 4, pp. 1348-1356, April 2011, doi: 10.1016/j.engstruct.2011.01.012.




- [5] X. He, J. Fang, A. Scanlon, and Z. Chen, "Wavelet-based nonstationary wind speed model in Dongting Lake cable-stayed bridge," *Engineering*, vol. 2, no. 11, pp. 895-903, Jan. 2010, doi: 10.4236/engineering.2010.211113.
- [6] Z. Rustam, R. P. Yuda, H. Alatas, and C. Aroef, "Pulmonary rontgen classification to detect pneumonia disease using convolutional neural networks," *TELKOMNIKA Telecommunication, Computing, Electronics and Control*, vol. 18, no. 3, pp. 1522-1528, 2020, doi: 10.12928/telkommika.v18i3.14839.
- [7] X. K. Dang, H. N. Truong, V. C. Nguyen, and T. D. A. Pham, "Applying convolutional neural networks for limited-memory application," *TELKOMNIKA Telecommunication, Electronics and Control*, vol. 19, no. 1, pp. 244-251, 2021, doi: 10.12928/telkommika.v19i1.16232.
- [8] S. Ren, K. He, R. Girshick, and J. Sun, "Faster R-CNN: Towards real-time object detection with region proposal networks," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 39, no. 6, pp. 1137-1149, 2017, doi: 10.1109/TPAMI.2016.2577031.
- [9] R. F. Rahmat, Dennis, O. S. Sitompul, S. Purnamawati, and R. Budiarto, "Advertisement billboard detection and geotagging system with inductive transfer learning in deep convolutional neural network," *TELKOMNIKA Telecommunication, Computing, Electronics and Control*, vol. 17, no. 5, pp. 2659-2666, Oct. 2019, doi: 10.12928/telkommika.v17i5.11276.
- [10] M. Rungruaganuku and T. Siriborvornratanakul, "Deep Learning based Gesture Classification for Hand Physical Therapy Interactive Program," *International Conference on Human-Computer Interaction*, vol. 12198, July 2020, pp. 349-358, doi: 10.1007/978-3-030-49904-4\_26.
- [11] T. Siriborvornratanakul, "An Automatic Road Distress Visual Inspection System Using an Onboard In-Car Camera," *Advances in Multimedia*, vol. 2018, pp. 2561953:1-2561953:10, 2018, doi: 10.1155/2018/2561953.
- [12] S. Sonawane, N. Bhadane, S. Zope, A. Pangavhane, and V. S. Tidake, "Design of bridge monitoring system based on IoT," *MVP Journal of Engineering Sciences*, vol. 1, no. 1, pp. 7-12, June 2018, doi: 10.18311/mvpjes/2018/v1i1/18258.
- [13] W. J. Li, C. Yen, Y. S. Lin, S. C. Tung, and S. Huang, "JustIoT of Things based on the Firebase real-time database," *2018 IEEE International Conference on Smart Manufacturing, Industrial & Logistics Engineering (SMILE)*, May 2018, pp. 43-47, doi: 10.1109/SMILE.2018.8353979.
- [14] X. K. Dang, V. C. Nguyen, T. P. Nguyen, T. D. A. Pham, and C. P. Vo, "A Vision Based System Design for Over-Sized Vessel Detecting and Warning Using Convolutional Neural Network," *International Conference on Industrial Networks and Intelligent Systems*, vol. 379, May 2021, pp. 416-430, doi: 10.1007/978-3-030-77424-0\_34.
- [15] J. L. Lee, Y. Y. Tyan, M. H. Wen, and Y. W. Wu, "Development of an IoT-based bridge safety monitoring system," *Proceedings of the 2017 IEEE International Conference on Applied System Innovation (ICASI)*, May 2017, pp. 84-86, doi: 10.1109/ICASI.2017.7988352.
- [16] Y. Yu, C. S. Cai, and L. Deng, "Vehicle axle identification using wavelet analysis of bridge global responses," *Journal of Vibration and Control*, vol. 23, no. 17, pp. 2830-2840, 2017, doi: 10.1177/1077546315623147.
- [17] P. Chatterjee, E. O'Brien, Y. Li, and A. Gonzales, "Wavelet domain analysis for identification of vehicle axles from bridge measurements," *Computers and Structures*, vol. 84, no. 28, pp. 1792-1801, Nov. 2006, doi: 10.1016/j.compstruc.2006.04.013.
- [18] W. Setiawan, M. I. Utoyo, and R. Rulaningtyas, "Classification of neovascularization using convolutional neural network model," *TELKOMNIKA Telecommunication, Electronics and Control*, vol. 17, no. 1, pp. 463-472, Feb. 2019, doi: 10.12928/telkommika.v17i1.11604.
- [19] R. P. Bandara, T. H. T. Chan, and D. P. Thambiratnam, "Structural damage detection method using frequency response functions," *Structural Health Monitoring*, vol. 13, no. 4, pp. 418-429, July 2014, doi: 10.1177/1475921714522847.
- [20] R. Wang et al., "A Crop Pests Image Classification Algorithm Based on Deep Convolutional Neural Network," *TELKOMNIKA Telecommunication, Electronics and Control*, vol. 15, no. 3, pp. 1239-1246, September 2017, doi: 10.12928/telkommika.v15i3.5382.
- [21] O. C. Reyes, P. Scully, and K. B. Ozanyan, "Deep neural networks for learning spatio-temporal features from tomography sensors," *IEEE Transactions on Industrial Electronics*, vol. 65, no. 1, pp. 645-653, Jan. 2018, doi: 10.1109/TIE.2017.2716907.
- [22] X. K. Dang, L. A. H. Ho, and V. D. Do, "Analyzing the sea weather effects to the ship maneuvering in VietNam sea from Binh Thuan province to Ca Mau province based on Fuzzy control method," *TELKOMNIKA Telecommunication, Computing, Electronics and Control*, vol. 16, no. 2, pp. 533-543, 2018, doi: 10.12928/telkommika.v16i3.7753.
- [23] X. K. Dang and L. A. H. Ho, "Joint fuzzy controller and fuzzy disturbance compensator in ship autopilot system: investigate stability in environmental conditions," *Journal of Current Science and Technology*, vol. 11, no. 1, pp. 114-126, 2021, doi: 10.14456/jcst.2021.13.
- [24] J. Gu et al., "Recent advances in convolutional neural networks," *Pattern Recognit*, vol. 77, pp. 354-377, May 2018, doi: 10.1016/j.patcog.2017.10.013.
- [25] J. Redmon, S. Divvala, R. Girshick, and A. Farhadi, "You Only Look Once: Unified, Real-Time Object Detection," *IEEE Conference on Computer Vision and Pattern Recognition*, pp. 779-788, 2016, doi: 10.1109/CVPR.2016.91.
- [26] M. Sandler, A. Howard, M. Zhu, A. Zhmoginov, and L. C. Chen, "MobileNetV2: Inverted Residuals and Linear Bottlenecks," *Proc. IEEE Conference on Computer Vision and Pattern Recognition*, 2018, pp. 4510-4520, doi: 10.1109/CVPR.2018.00474.

## BIOGRAPHIES OF AUTHORS






**Xuan-Kien Dang** received Ph.D. degree in Control Science and Engineering, Huazhong University of Science and Technology in June 2012. He is serving as the Director of Graduate School, Ho Chi Minh City University of Transport, Vietnam. He has been awarded the Best Paper Award in the 4<sup>th</sup> Conference of Science and Technology, Ho Chi Minh City University of Transport (2018), the President Prize for Award Winner of the Excellent Paper of the 17<sup>th</sup> Asia Maritime & Fisheries Universities Forum (2018). His current research interests focus on Control Theory, Automation, Maritime Technology, Underwater Vehicles, Optimal and Robust Control, and Networked Control System. He can be contacted at email: [kien.dang@ut.edu.vn](mailto:kien.dang@ut.edu.vn).






**Le Anh-Hoang Ho**    he earned a Master's degree in Automation and Control Engineering from Vietnam's Ho Chi Minh City University of Transport in 2018. He is now a lecturer at Vietnam's Van Hien University. Control Theory, Automation, the Internet of Things, and Artificial Intelligence are among his main research interests. He can be contacted at email: [hoanghla@vhu.edu.vn](mailto:hoanghla@vhu.edu.vn).



**Xuan-Phuong Nguyen**    achieved Ph.D. degree in System Analysis, Control and Information Processing at the Scientific-Research and Experimental Institute of Automotive Electronics and Electrical Equipment, Russia in Dec. 2011. He was conferred Associate Professor title in 2016. His current research interests focus on Maritime Technology, Underwater Vehicles, Automotive Electronics and Electrical system, and Environmental Protection. He can be contacted at email: [phuong@ut.edu.vn](mailto:phuong@ut.edu.vn).



**Ba-Linh Mai**    received Ph.D. degree in Navigation, Odessa National Maritime Academy, Ukraine in May. 2005. He was serving as the lecturer of Navigation Dean, Vietnam Maritime University in 2006. He is working as the Principal Officer in Science and Technology Department, Ministry of Transport of Vietnam. His current research interests focus on Maritime Technology, Underwater Vehicles, and Transportation. He can be contacted at email: [maibalinhbogvt@gmail.com](mailto:maibalinhbogvt@gmail.com).